

INSTALLATION GUIDE

COVELINE · SAUNA · HIGH TEMPERATURE

CoveLine Sauna Installation Guide

LCC-SN-30-90-68-RL-24 · V1



INPUT	POWER	ROLL	BOARD WIDTH	CUT INTERVAL	RATING
24V DC · Class 2	2.4 W/ft · 80 W per roll	32.8 ft (10 m)	0.39 in (10 mm)	every 1.97 in (50 mm)	IP68 silicone extrusion

01 Before You Start · Safety

- **Disconnect power** before making any connection, and reconnect only when every connection is finished.
- **Total load ≤ 80%** of the driver's and the controller's rated power. One full roll draws 80 W, so it needs a driver rated at least 100 W.
- **Class 2, 24V DC only.** Never connect the tape to line voltage.
- **Do not bend, twist or step on the tape.** Do not strike the light-emitting face with hard objects.
- **Keep conductors apart.** The wires must not touch each other: a touch is a short circuit.


02 Prepare the Surface

- Clean the mounting surface. It must be clean, dry and flat before the adhesive goes on.
- Mount the tape in an aluminum channel (profile) with a diffuser where the tape can be seen.
- Board width: 0.39 in (10 mm), sealed in a solid silicone extrusion 0.47 × 0.18 in (12 × 4.5 mm). Size the channel to the extrusion.

03 Handling Limits

- **Soldering:** iron at or below 300 °C (572 °F), no more than 3 seconds per joint.
- **Bending:** bending diameter greater than 3 cm (1.2 in) at any point. No sharp bends over a short distance.
- **Twisting:** no more than 720° (two full turns) per 0.5 m (1.6 ft) of tape.

04 Cut

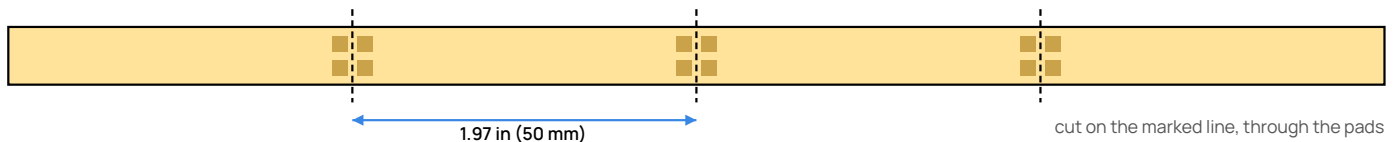


- Cut only on the marked cut lines, every 1.97 in (50 mm). A cut anywhere else disables that section.
- Re-seal every cut end with an end cap so the run stays sealed.

Values are nominal. Install to the applicable electrical code. LeonLite® Commercial reserves the right to change specifications without notice. Consult with the LeonLite Commercial team before installing.

05 Mount

- Dry-fit the run in the channel first and mark the feed point.
- Peel the 3M adhesive backing a little at a time and press the tape along the channel floor. Press on the board edges, not on the light-emitting face.

06 Wire

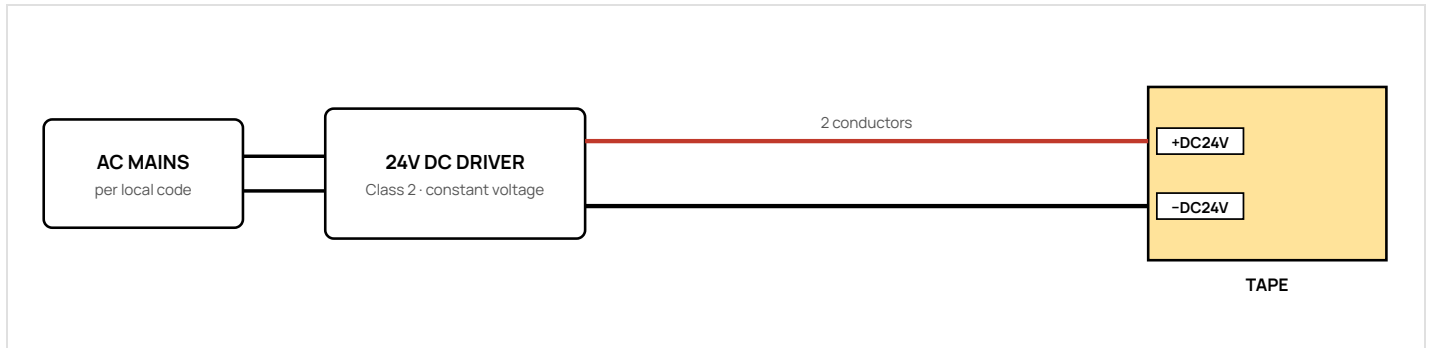

Single colour · 2 conductors. +DC24V to the driver's positive output, -DC24V to the negative output. Dimming is set at the driver: 0–10V, DALI or DMX.

07 Feed and Load

- Each roll is supplied with leads fitted at both ends.
- LEONLITE 200 W driver: up to 2 full rolls (80% load).

08 Sauna and Wet Locations

- Made only in a solid IP68 silicone extrusion: there is no IP20 or IP67 version.
- Working temperature -25 °C to +100 °C (-13 °F to 212 °F).

09 Power Up

- Check every connection against the diagram before power is applied.
- Restore power at the driver and check the run end to end.

Values are nominal. Install to the applicable electrical code. LeonLite® Commercial reserves the right to change specifications without notice. Consult with the LeonLite Commercial team before installing.